WASH STAND INSTALLATION GUIDE

Recommended Tools:
- Drill - Level - Hammer - Pencil
- Phillips head screwdriver - Safety Glasses

BEFORE YOU BEGIN ** **IMPORTANT** **

1) Professional installation by two-person crew is required for this fixture
2) Assembly this fixture on a blanket or smooth cardboard.
3) We do recommend installing wood blocking inside your wall to add support to your stand. If you choose not to insert wood blocking, you will need to use heavy duty anchors (such as steel or toggles).
4) Slide the joint onto support bar slightly to avoid scratch.

INSTALLATION STEP

1) Assembly support legs as shown. Threading the vertical rod through the 4-way connector first, connect horizontal rod to the 4-way connector, set the wall escutcheon and feet flange. Tighten all the connecting set screws. Repeat the opposite leg.

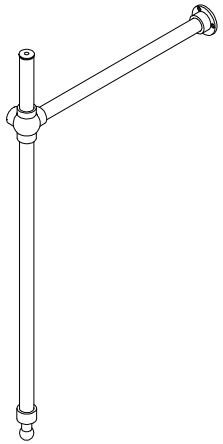

2) After assembling both sides support legs, attach front bar to join both sides and tighten set screws.
3) With one person on either side of assembled stand, carefully position the wash stand in desired location. Use a pencil mark position of wall escutcheon screw holes on wall as well as the perimeter of the location of feet flange on floor.
4) Loosen feet flange set screw, thread the floor screw with feet flange and screw it into floor.
5) Drill holes on wall for wall escutcheon and push anchors flush with wall
6) Insert the support legs into feet flange and fasten wash stand to wall with mounting screws. Tighten feet flange set screw.
7) Mount the sink to the wall according to the instructions provided with that product.
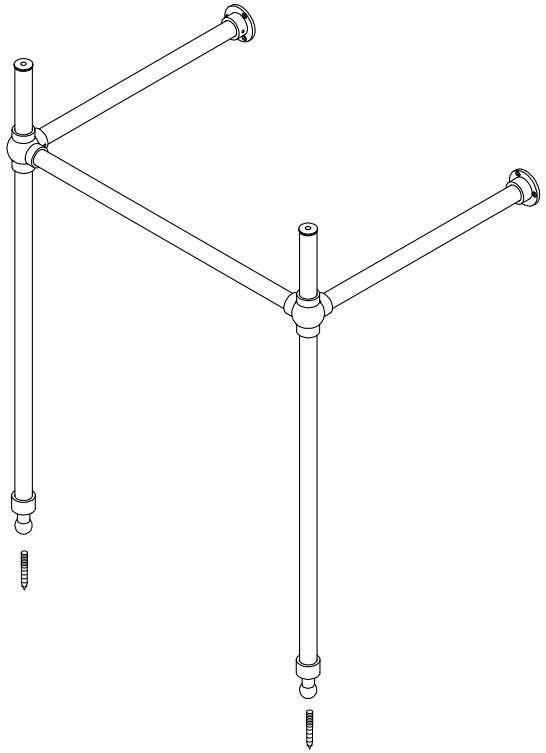
Note: If necessary to cut the pipe length to fit sink.