

Wall Mounted Sink Installation Manual

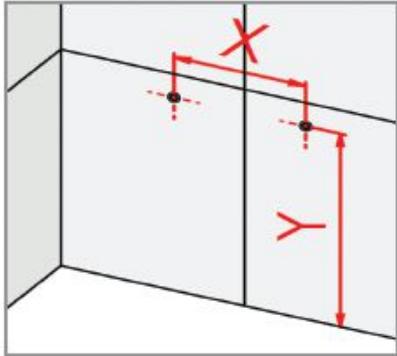


Figure-1:
The dimension X between the mounting holes and the dimension Y indicating the height of the holes above the ground are marked on the wall in accordance with the catalog dimensions.

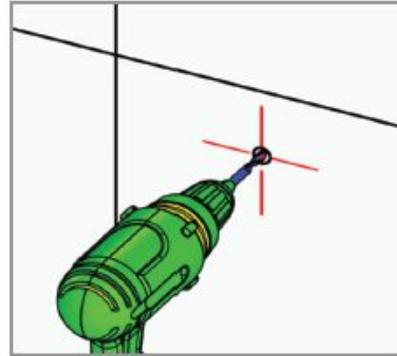


Figure-2:
The dowel holes are drilled by using suitable drilling bit on the marked points and the dowels are attached in such holes.

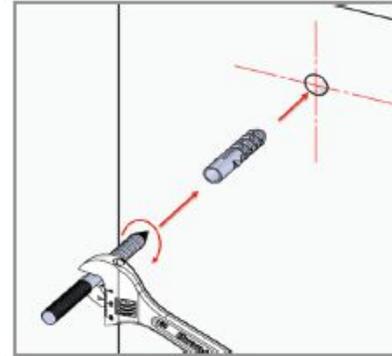


Figure-3:
The mounting studs of the wash basin are attached to the dowels.

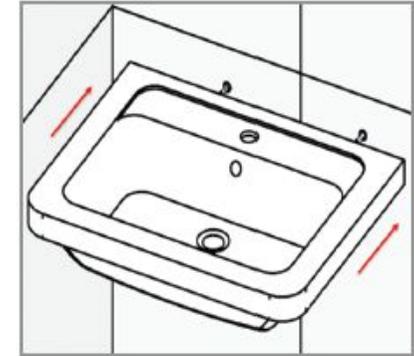


Figure-4:
The wash basin is inserted to the studs through the mounting holes.

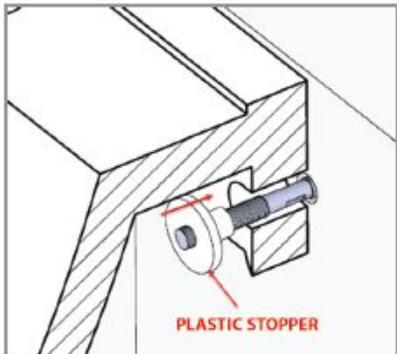


Figure-5:
The wash basin is mounted to be on the studs by passing the plastic stopper through the stud.

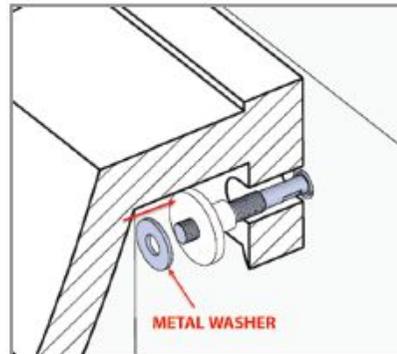


Figure-6:
The metal washer is attached by passing through the stud.

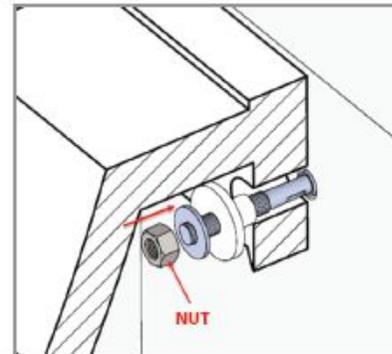


Figure-7:
The hexagonal nut is attached by passing through the stud.

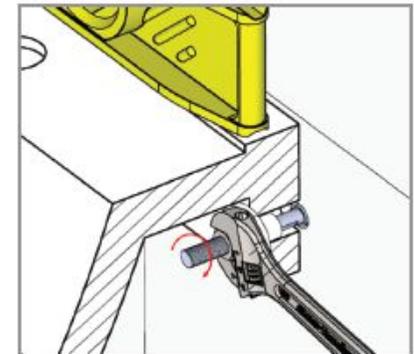


Figure-8:
The wash basin is balanced by using water gauge and the installation of the wash basin is completed by tightening the nut completely.